

ML-90 CERTIFIED TORTILLA MACHINE

DATA SHEET

MAIN SPECIFICATIONS

POWER SUPPLY: 220 VCA 60Hz Two-phase motor

MOTORS: 2HP - 2HP

ELECTRICAL CONSUMPTION: 3.2 kW/h

GAS CONSUMPTION: 5.9 m³/h - natural gas

2.3 m³/h - LP gas (vaporized)

CALORIFIC VALUE: 207,860 BTU/h

GAS TYPE: Natural or LP

MINIMUM LP GAS PRESSURE: 10 PSI=lb/inch²

WEIGHT: 705 kg

PRODUCTION CAPABILITY

TORTILLA SIZE: 10 a 16 cm

TORTILLAS PER HOUR: Up to 3350*

*Depending on temperature, dough texture, etc.

Note: The diameter of the tortilla depends on the cutter used

• All components that come into contact with the dough are hygienic grade.

- Produces 56 tortillas per minute*
- Saves space

Main features:

- Saves labor
- Saves on gas and electricity
- Easy maintenance oven

- Low operational cost
- Reinforced transmissions
- Thermal treatment in sprockets
- Stainless steel thermal covers
- Industrial gear reducer

- Safety solenoid valve
- Electronic ignition
- Teflon griddle
- Hygienic grade hopper



COMPONENTS:


◆Head unit
◆Bench
◆Cooking oven
◆Cooler
◆Control Panel


Product features:

- Excellent cooking
- High quality tortillas
- Versatility on size and shape

AN-VT-03-I,300523,00 ML90N-310125-01



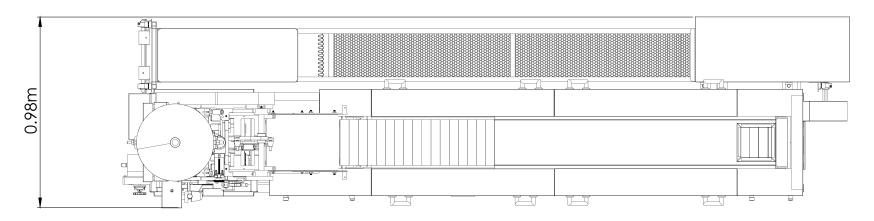

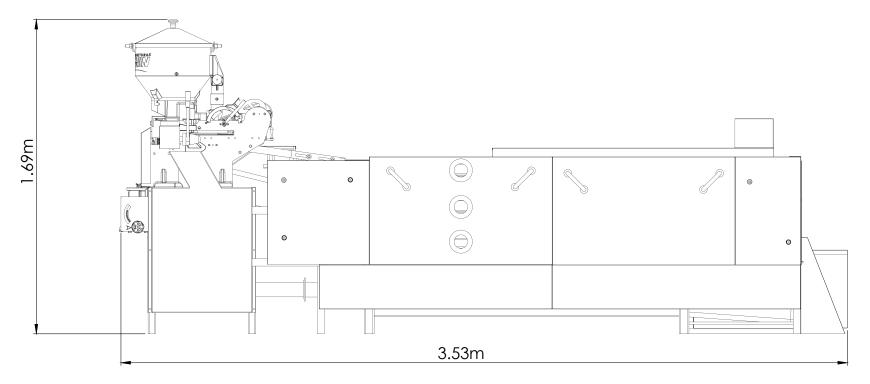

AN-VT-03-I,300523,00 ML90N-310125-01